

# 2015 HINO 338

4 x 2 CONVENTIONAL GVW: 33,000 LBS. BBC: 108" ENGINE MODEL: J08E-VB (TURBO INTERCOOLED)



A Toyota Group Company

## DIMENSIONS

Wheelbase	A in.	152/G	175/J	187/L	205/M	217/P	235/R	253/T	271/V
Overall length	B in.	242.6	278.6	302.6	320.6	354.6	372.6	390.6	390.6
Overall width	C in.	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
Overall height	D in.	107.1	107.1	107.1	107.1	107.1	107.1	107.1	107.1
Cab to axle	E in.	84.6	107.6	119.6	137.6	149.6	167.6	185.6	203.6
Rear overhang	F in.	50.0	63.0	75.0	75.0	97.0	97.0	97.0	79.0
Frame height at									
Front axle	G in.	37.0	37.0	37.0	37.0	37.0	37.0	37.0	37.0
Rear axle	H in.	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6
Road clearance (at diff. axle)	J in.	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2
Tread									
Front	K in.	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3
Rear	L in.	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
Turning diameter									
Curb to Curb	ft.	42.0	47.5	50.5	54.8	57.7	62.1	66.4	70.8
Wall to Wall	ft.	45.4	50.9	53.9	58.2	61.1	65.5	69.8	74.2

## CHASSIS WEIGHTS

Total weight	lb.	10,580	10,690	10,770	10,935	11,025	11,090	11,135	11,200
Front axle	lb.	6,445	6,680	6,735	6,845	6,845	6,925	7,045	7,045
Rear axle	lb.	4,135	4,010	4,035	4,090	4,180	4,165	4,090	4,155

## POWERTRAIN AND PERFORMANCE

GVW		33,000 lbs.														
GCWR*		33,000 lbs.					48,000 lbs.			48,000 lbs.						
Powertrain		STD		OPT			OPT			OPT						
Max. speed mph** (programmable)		75	75	75	74	70	75	75	75	71	68	75	75	75	71	68
Startability (tan.θ) %		39.6	33.9	37.2	42.0	44.5	57.7	48.5	53.8	60.0	60.0	28.7	24.8	27.1	30.4	32.0
Transmission	Model	Allison 2500RDS with Shift Energy Management					Allison 3000 RDS			Allison 3500 RDS						
Fluids		Synthetic														
		Six-speed automatic					Six-speed automatic			Six-speed automatic						
Ratios	1st	3.512					3.487			4.593						
	2nd	1.896					1.864			2.257						
	3rd	1.439					1.409			1.535						
	4th	1.000					1.000			1.000						
	5th	0.737					0.750			0.749						
	6th	0.640					0.650			0.651						
	Rev	5.086					5.027			4.999						
Rear Axle	21K Axle	5.57	4.88	5.29	5.86	6.14	5.57	4.88	5.29	5.86	6.14	5.57	4.88	5.29	5.86	6.14
Gear Ratios	23K Axle	---	---	5.38	5.63	6.14	---	---	5.38	5.63	6.14	-	-	5.38	5.63	6.14
Tires (standard)		11R22.5-14														

\*Condition is City delivery and 8% Max Grades

\*\* Max speed is limited by speed limiter


## ENGINE

Model	J08E-VB
Type	Diesel 4-cycle, 6-cylinder in-line water-cooled, dry cylinder line
Combustion system	Direct injection type
Max. output (SAE Gross)	260HP at 2,500 rpm
Max. torque (SAE Gross)	660 lb.-ft. at 1,500 rpm
Bore and stroke	4.41 x 5.12 in.
Piston displacement	8L
Fuel injection system	Common rail (HP-4)
Governor	Electronically controlled
Intake system	Turbocharged and intercooled
Air cleaner	Paper filter type (Donaldson)
Fan clutch	Bimetal thermostat sensor regulates fan speed
Glow plugs	Standard
Air compressor	Single cylinder, 15 cfm @ 1,250 rpm

## HINOWATCH (service free of charge)

3 year unlimited roadside assistance

- Lockout Service
- Battery Jumpstart
- Information
- Warranty Towing (2 year coverage)

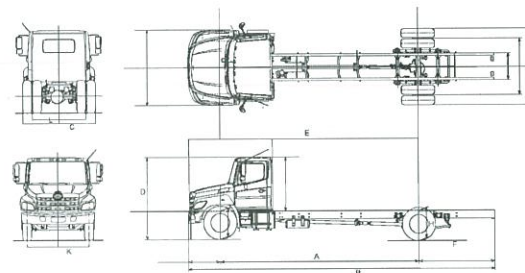

WWW.HINO.COM



## WEIGHT CAPACITIES

Front axle	lbs.	12,000
Front axle (option)	lbs.	10,000
Front axle (option)	lbs.	14,000
Rear axle	lbs.	21,000
Rear axle (option)	lbs.	23,000
Front spring	lbs.	12,000
Rear spring	lbs.	21,000

## LIQUID CAPACITIES

Fuel tank	gal.	50
Cooling system	gal.	6.6
Engine oil	qt.	16.2
DEF tank	gal.	4.7

## AXLE / SUSPENSION

Front axle	MFS-12 series reversed Elliot, "I" beam with 12,000 lb (oil lubricated type)
Front spring	Taper-leaf springs shock absorber
Rear axle	RS21-145 series, full-floating, single reduction, single-speed by hypoid gearings
Rear spring	Semi-elliptic main and optional 4,500 auxiliary rubber rear spring (available on 23K rear axle option)

## FRAME

Ladder type		Straight C Channel
Width	in.	34
Yield strength	PSI	80,000
Resisting bending moment (one side, no reinforcement)	in.-lbs.	1,280,800

## STEERING

Steering column	Tilt and telescopic with lock adjustability
Steering system	TRW recirculating ball, with hydraulic booster, integral type

## WHEELS / TIRES

6 Wheels	22.5 x 8.25 10-stud disc.
Wheel style	Steel, powder coated
6 Tires	11R22.5(G)
Tire pattern	Fr-rib Rr-all season

## BRAKES

Service brake	Full air, dual circuit, "S" cam type, leading & trailing shoes with automatic adjustment
Drum diameter x lining width (in.) x thickness (in.)	Front (12K): 15 x 4 x 0.73 Front (14K): 16.5 x 5 x 0.73 Rear: 16.5 x 7 x 0.85
Control	Full air dual circuit with Antilock Brake System (ABS)
Parking brake	Spring brake acting on rear wheels
Exhaust brake	Electric-pneumatic with valve in exhaust pipe

## CHASSIS EQUIPMENT

Radiator grille	Chrome
Fuel tank	Aluminum
Fuel pre-filter	Heated pre-filter (dust) and sedimenter (water) - Davco
Reflectors	Two rear, two front side
Tow hook	One at front
Air dryer	Bendix, heated
Air tank	68L
Clean chassis CA	Standard with 50 gal fuel tank mounted under cab (driver side)

## CAB EQUIPMENT

Air conditioning	Standard
Cab construction	All steel welded
Cigarette lighter	Equipped
Coat hook	One (rear panel)
Cruise control	Standard
Cup holders	Standard
Door pockets	Two
Driver's seat	2-way adjustable seat with arm rest and air suspension, covered with vinyl
Heater/Defroster	18,357 BTU/h
Mirrors	Four, 1-flat and 1-convex at each side
Overhead consoles	Two
Passenger's seat	Bench type, covered with vinyl
Seat belts	3-point type (outside), one 2-point type (inside)
Seating capacity	Three
Speakers	Two
Sun visors	Two
Windshield	Tinted
Windshield wipers	Dual electric, 2-speed/intermittent

## DASH INSTRUMENTATION

Meters and gauges ft. lb. system	
	Speedometer-mph (km/h)
	Odometer (mile)
	Fuel gauge / DEF gauge
	Coolant temperature gauge
	Engine tachometer
Warning and pilot lamps and buzzers/audio	
	Oil pressure warning lamp and buzzer
	Brake pressure warning lamp and buzzer
	Coolant level warning lamp and buzzer
	Battery charging warning lamp
	High beam indicator lamp
	Parking brake warning lamp
	Engine control system warning lamp
	ABS warning lamp
	DEF quantity and quality audio
Driver Information Display (multilingual)	
	Instant and trip fuel consumption
	DPR monitor
	Maintenance
	Engine/vehicle diagnostics

## ELECTRICAL EQUIPMENT

Batteries	Two, parallel connection, each 12V
Capacity	1200 CCA
Alternator	12 V, 130 A, brush Delco
Starter	12 V, 4.0 kW Denso
Stereo	AM/FM radio with CD player
Headlamps	Daytime running
Back-up lamps	
Dome lamp	
Electric horn (dual)	
Front side marker lamps	
Side-flasher lamp	
Stop/Tail lamps	
Trucklite LED marker lamps (front)	

## OPTIONAL EQUIPMENT

Air horn
Air ride suspension - Hendrickson
Air ride suspension dump valve - Electric
Alternator - 12 V, 135 A, brushless Delco
Alternator - 12 V, 180 A, brush Delco
Anti-Siphon device insert in fuel tank
Back-up alarm
Battery - Absorbed glass mat 31 configuration, 1850 CCA
Battery - Three each 12 V (GR27x3)
Battery - Two or three each 12V (GR31 type)
Bluetooth
Bumpers; chrome, black, white
4 inch extensions
Cab paint, exterior - Black or red (factory)
Cold weather package
- Power heated mirrors (available in chrome)
- Engine block heater only/Engine block heater and cable
- Heated fuel filter
Differential lock with controls
Engine block heater
Engine idle shutdown
Exhaust system - Vertical stack type
Extra switch - dome light switch
Frame rail - 120,000 psi (34.1 frame width)
Front frame extension and stationary grille
Fuel tank - Dual 50 gal
Fuel tank - Single 90 gal. (except on G wheelbase)
GVW Derate 25,950
GVW 35,000 (available on 12K front, 23K rear axle)
Hino INSIGHT Telematics System
Keyed alike - Matching key codes
Keyless Entry
Key plates - four key option
Mirrors, fender mounted - Chrome (both sides or passenger only)
Mirrors, outside rearview - Chrome
Mirrors, power heated (available in Chrome)
Orange seatbelts
Power windows and power door locks (available with keyless entry)
Programmable speed limit 65, 70 mph
Rear helper spring - Sub leaf type
Seats - Fabric with reclining single person passenger seat
Seats - Vinyl with reclining single person passenger seat
Seats - Fabric with two person bench seat
Sears seat - Vinyl black or fabric black/silver (upgrade driver seat only or with passenger seat upgrade)
Shock absorbers, rear
Stabilizer, rear (leaf suspension only)
Synthetic fluids - Rear differential
Tire pattern - Rib on rear
Tire size - 295/75R22.5-14(G) (available on 21K rear axle only)
Transmission, automatic - Allison 3000/3500 RDS
Wheels - Alcoa polished aluminum
Wheels - Powder coated gray

## NOTES

All specifications of the products are with normal manufacturing allowances and tolerances. Hino Motors Sales U.S.A., Inc. reserves the right to alter specifications at any time without previous notice. Some optional items of equipment may require extra time due to the need for their adaption on the product line.