

Trail King Introduces...

AdvantageTM

Series
APB 1633E

External Ring Pneumatic Dry Bulk Trailer Engineered To Be Light...

Mandrel bent piping provides unobstructed product flow, reduces friction, and lowers unloading temperatures.

New external ring design eliminates places where product build-up occurs.

Lightweight one-piece formed aluminum support channels (front and rear) conform perfectly to the tank for optimum strength.

42-foot overall length means less weight, more maneuverability.

Thicker body shell, combined with external ring design, increases strength and durability.

**Lightest
Pneumatic Bulk
Trailer
Of Its Kind!**




**TRAIL KING
industries**

Trail King – Your Complete Trailer Team

Trail King Industries ■ 800-762-5557 ■ www.trailking.com



Series APB 1633E External Ring Pneumatic Dry Bulk Trailer

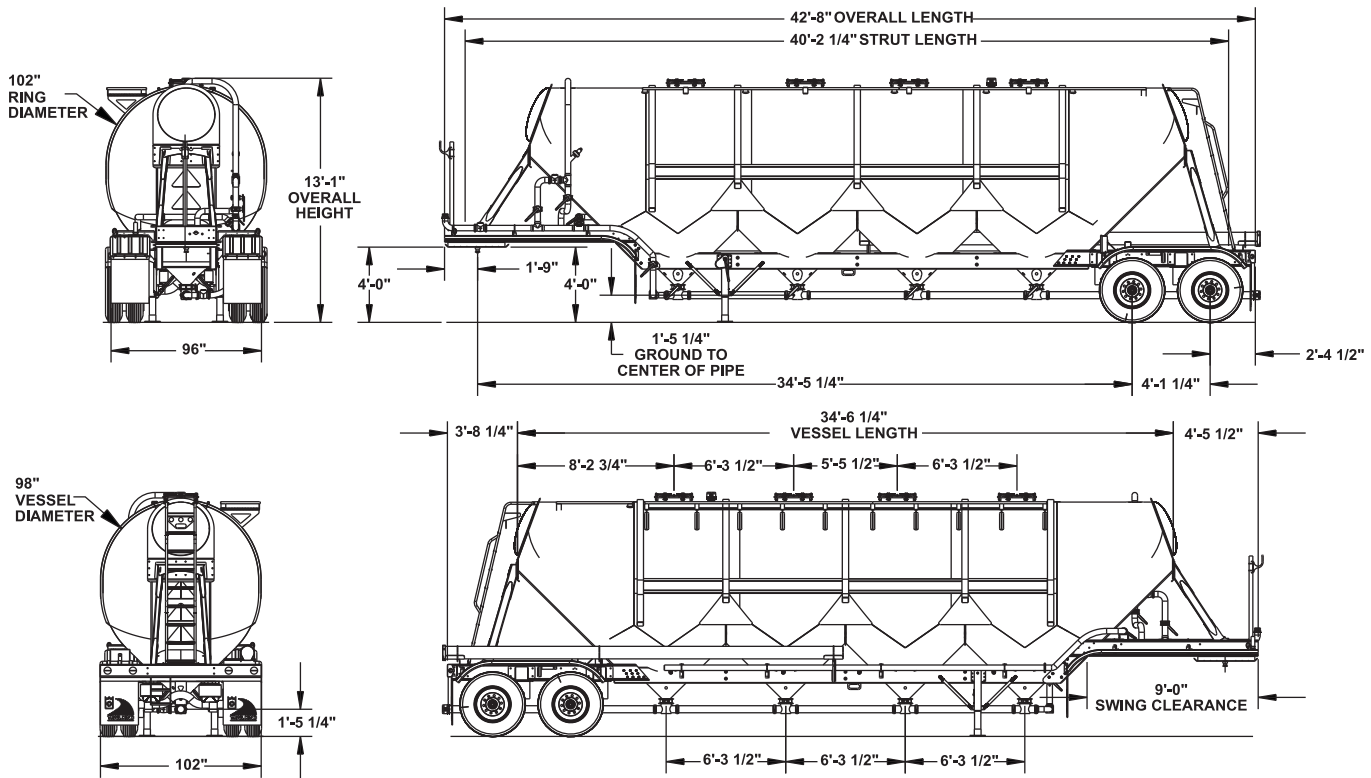

Standard Equipment

Kingpin to Center of Last Axle: 38' 7" (21" KP setting)
 Overall Length = 42' 8"
 Overall Width = 102"
 Overall Height = 13' 1" (w/ 48" Fifth Wheel)
 Capacity = 1633 cubic feet
 Standard Fifth Wheel (Bolted & Adjustable)
 4-Hopper, 45 Degree Vessel
 5" Product Valves
 Toe Rails on Vessel (Extending To Front-Most Manhole)
 Aluminum End Frames
 Aluminum Struts
 Non Food Grade w/ Brite Finish
 4 Manholes - 20" Manholes w/ Nylon Wear Plate
 3" Air Inlet on Road Side w/ Male Adaptor
 Blow Down Line - Road Side Front, Terminating
 Between Mainframe, Angled Towards Rear

3 Solimar Fluidizers Each Hopper w/ Hopper
 Savers (Controlled By One (1) 3" Butterfly
 Valve On Front Fender)
 5" Ultraflo #400 (Iron Disc w/ Black Nitrile Seat)
 5" x 4" Aluminum Gravity Drop Tees
 Product Line Piping - 4" Sch 40 Aluminum w/
 Grooved Pipe Connectors
 Discharge Piping - 4" Sch 40 Aluminum w/
 Grooved Pipe Connectors Terminating
 Below the Axles
 Tandem Axle Suspensions: (2) 23k Intraax
 AANT Air Ride
 Soft Coated Suspensions
 P Spindle Axles
 Duralite hub-piloted - Centrifuse Drum
 Stemco Platinum Plus Wheel Ends 5-yr./500,000-mi

8.25 x 22.5 Aluminum Machined Wheels
 4S2M Anti-Lock Brake System
 11R22.5 General ST250 14-Ply Radial Tires
 Aluminum Fenders (Front & Rear)
 Aluminum Air Tank
 Ladder @ Rear w/ Hand Rail
 LED Lights - DOT Required w/ Midturn
 (High Mounted 3rd Stop Light)
 Trail King Anti-Sail Mudflaps
 Two Speed (Crank Road Side)
 (Armor Coated Black)

*** NOTE: It is recommended that the vessel interior be cleaned professionally prior to initial loading to avoid product contamination.

Trail King – Your Complete Trailer Team

Trail King Industries ■ 800-762-5557 ■ www.trailking.com

All rights reserved Trail King Industries, Inc.
 FORMTKAPB1633E3/2013-2.5

